

# Device Link for MacBook

## Quick-Start Guide 2


### First Start

Before starting this guide, please follow Device Link Quick-Start Guide 1 - Station Setup


1. • Power on Device Link Unit by pressing the power button on the front of the box



- When Device Link is booted and ready, you'll see the main GUI
- Navigate to the **Manage** tab

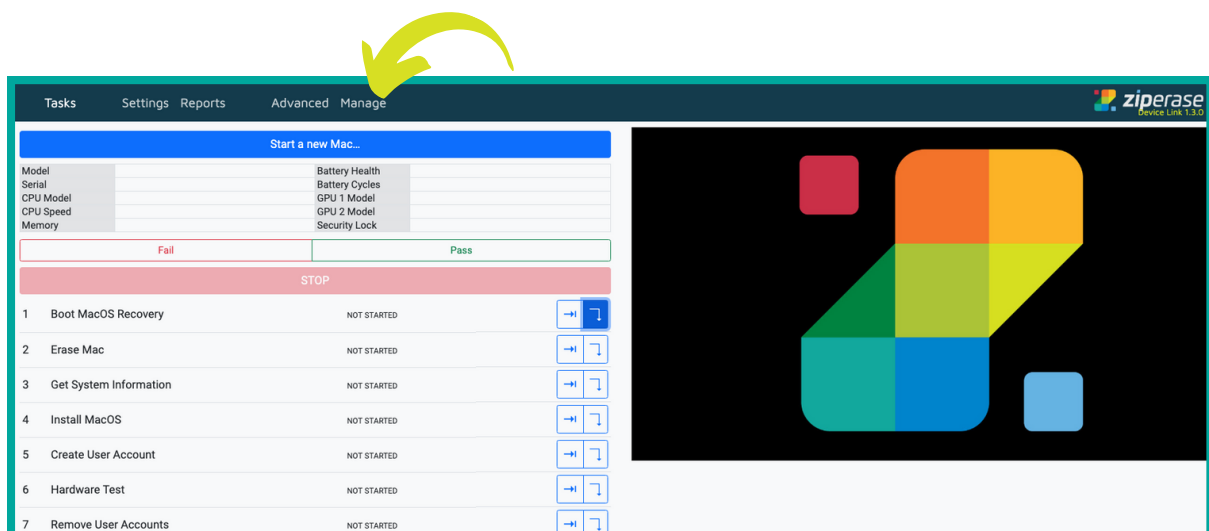


2. • Under the **Manage** tab, find and take note of the Station name

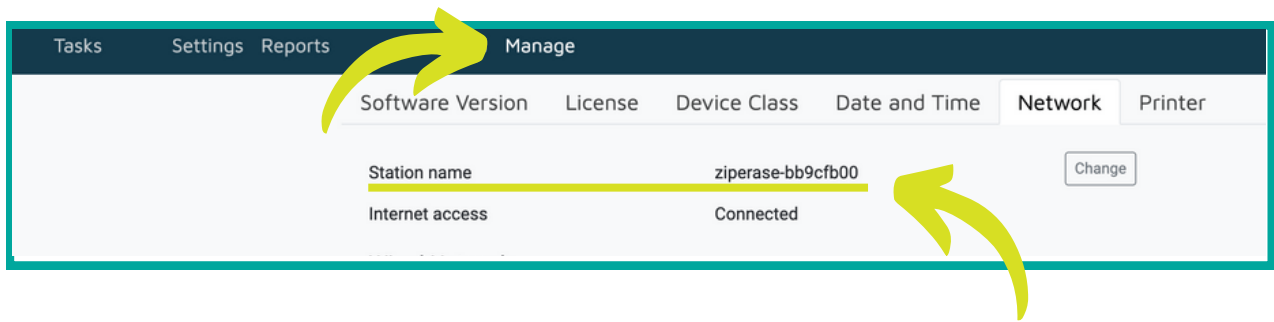


### Important things to know about the Station name:

- It **includes the serial number of the Device Link box** (in this example, bb9cfb00)
- The Station name is printed on the Device Link unit and is **included in final device reports**, issue reports sent to Ziperase, and for various network connections
- The **Station name is the hostname for the Device Link unit**, and is advertised on the local network via multicast DNS (mDNS)
- Network setup permitting, you can **identify and connect to the station from any other browser on the local network** by connecting to `http://ziperase-bb9cfb00.local:8086` (replace bb9cfb00 with your current serial number)
- The **Station name must be uniquely identifying for each station**

3. • While you're here, check to see you're connected to the internet

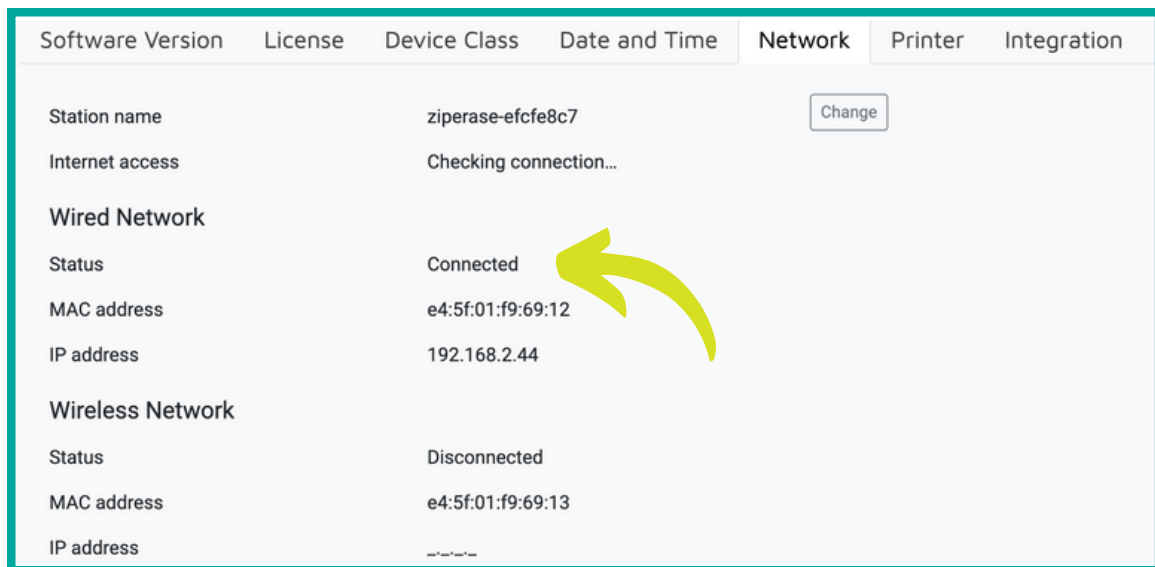

4.
  - Click Software Version
  - Check to see if you have the latest version
  - Click on [Install update](#) if one is available

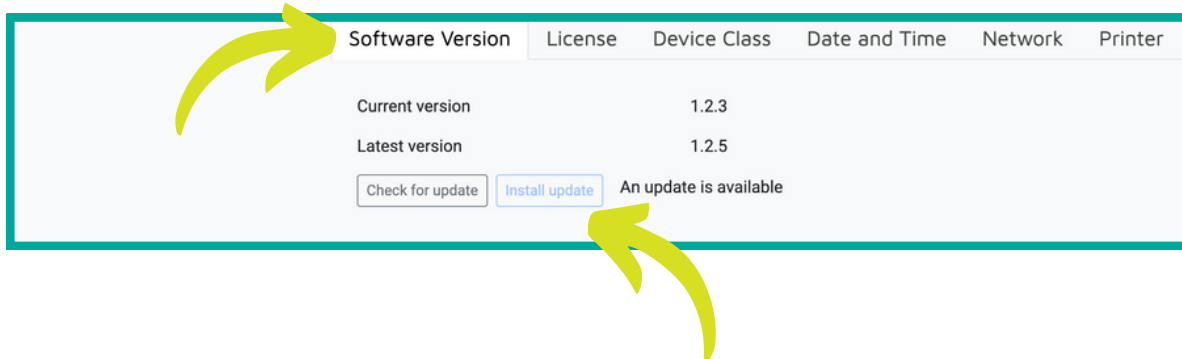


**That's it! You're all set up and ready to go.**  
**Next up: How to process a Mac in 3 easy steps!**


## Processing a Mac in 3 Easy Steps


**IMPORTANT: Follow these steps BEFORE connecting the MacBook to be erased**

1.
  - Navigate to the Tasks page on the Device Link station
  - Click [Start a new Mac...](#)
  - This starts a new session that isn't terminated until Fail or Pass are pressed


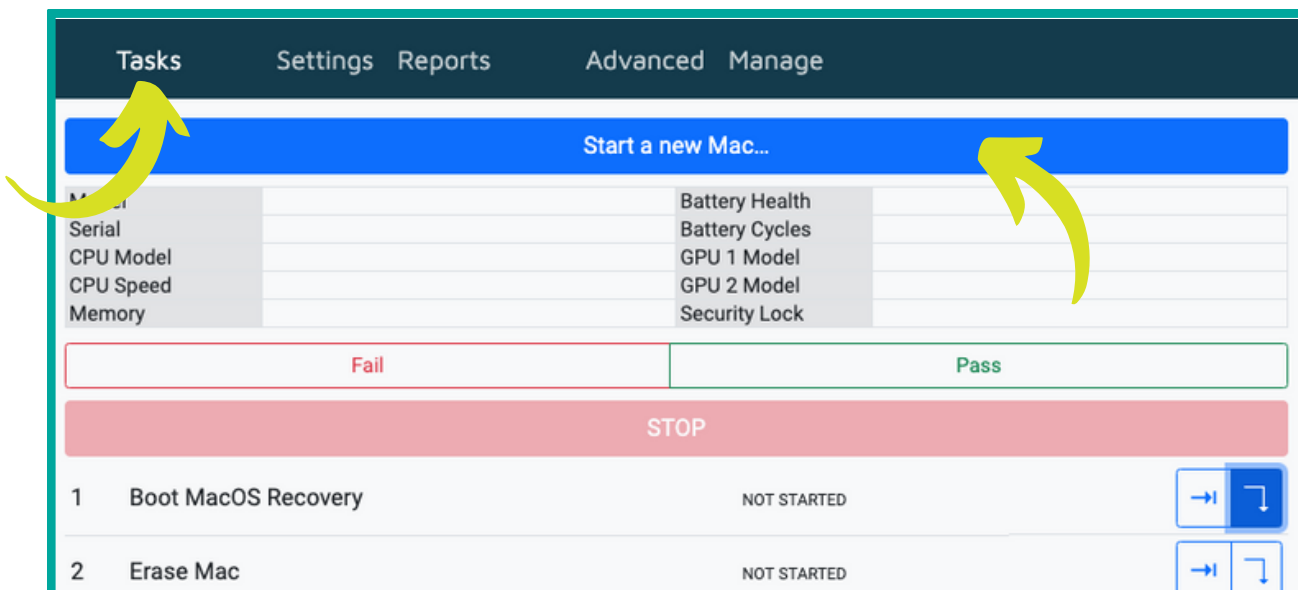


## Time to connect the MacBook for erasure

2.
  - Connect the appropriate cables to the target MacBook and make sure it is **powered off**
  - On the Tasks page, click the  on row 1

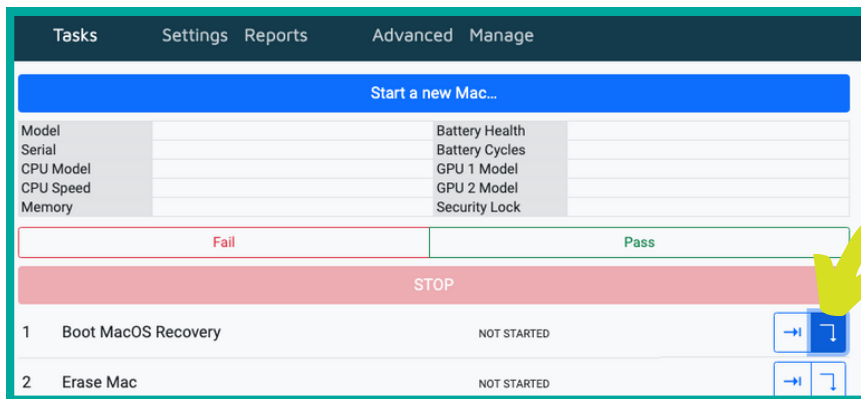

- If you see a **yellow** alert pop-up, Device Link needs an operator to do something
- A **red** alert pop-up indicates an error or warning
- Device Link will display a message in each instance to tell you what the issue is

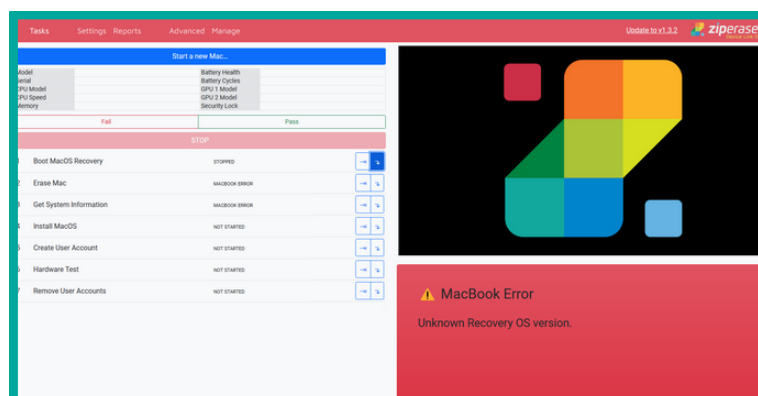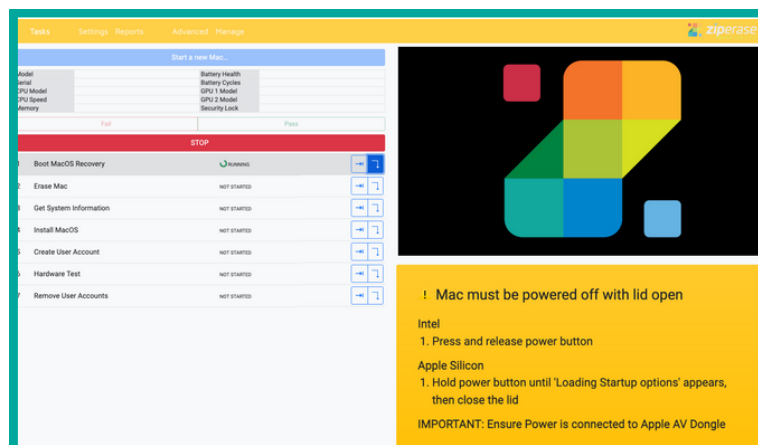

4. • Once all the task have been completed, click **Pass** or **Fail** to complete the session



- The Mac can be removed from the Device Link Station, and the next session started

**For more detailed instructions and to learn about configurations and options available, go to the Device Link User Guide in the Ziperase [Customer Portal](#) under the downloads tab:**

