

Device Link for MacBook

Quick-Start Guide 2


First Start

Before starting this guide, please follow Device Link Quick-Start Guide 1 - Station Setup


1. • Power on Device Link Unit by pressing the power button on the front of the box



- When Device Link is booted and ready, you'll see the main GUI
- Navigate to the **Manage** tab

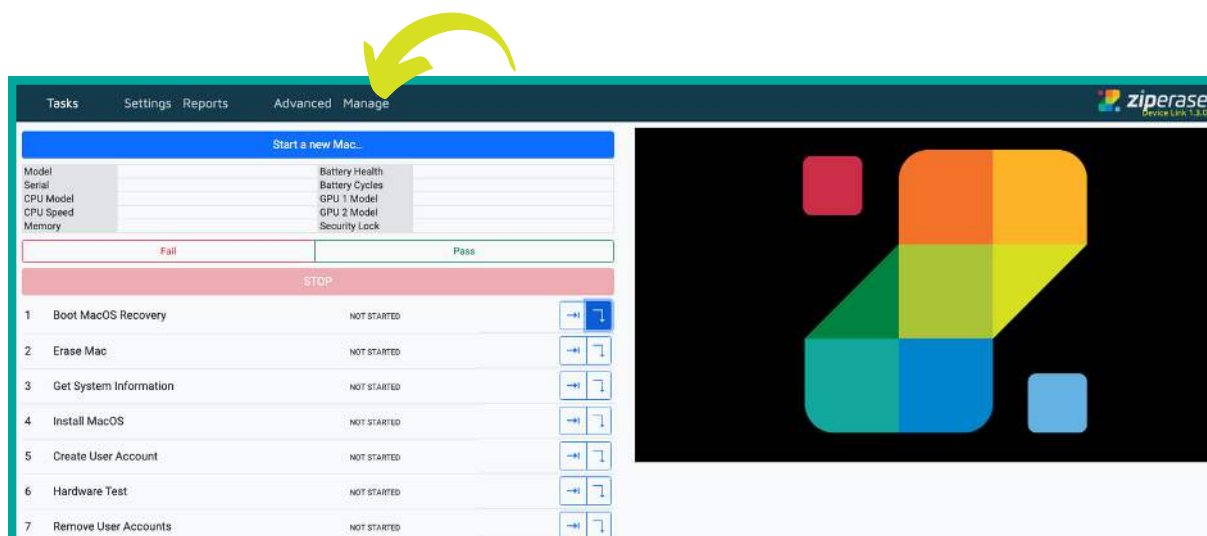


2. • Under the **Manage** tab, find and take note of the Station name

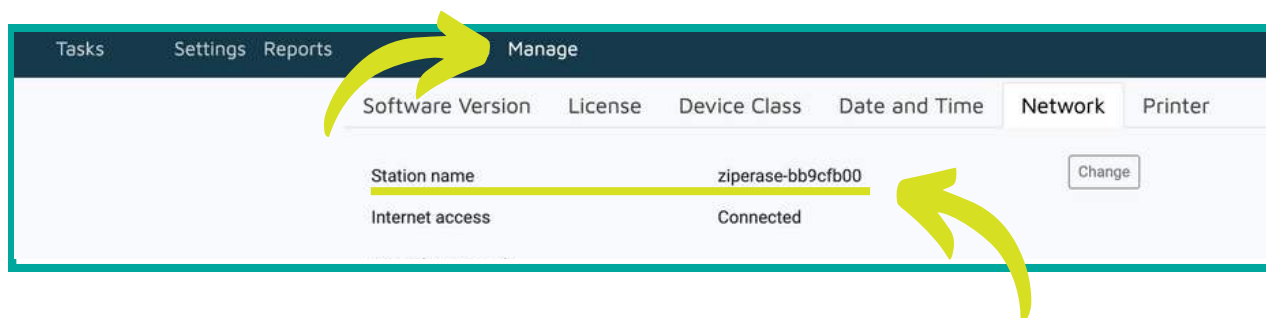


Important things to know about the Station name:

- It **includes the serial number of the Device Link box** (in this example, bb9cfb00)
- The Station name is printed on the Device Link unit and is **included in final device reports**, issue reports sent to Ziperase, and for various network connections
- The **Station name is the hostname for the Device Link unit**, and is advertised on the local network via multicast DNS (mDNS)
- Network setup permitting, you can **identify and connect to the station from any other browser on the local network** by connecting to `http://ziperase-bb9cfb00.local:8086` (replace bb9cfb00 with your current serial number)
- The **Station name must be uniquely identified for each station**

3. • While you're here, check to see you're connected to the internet

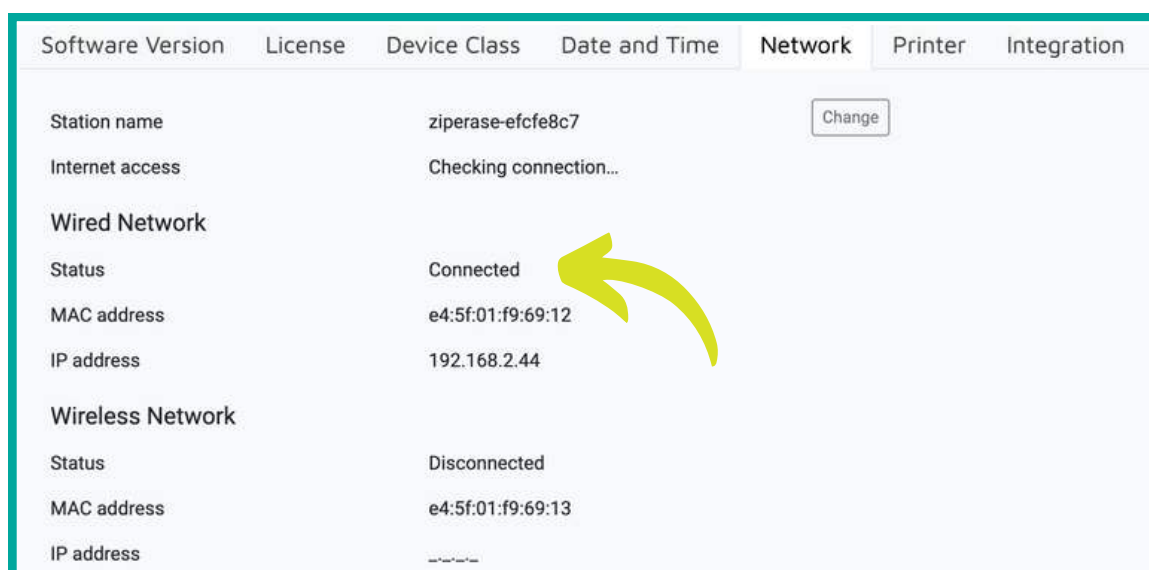

- 4.
- Click Software Version
 - Check to see if you have the latest version
 - Click on [Install update](#) if one is available

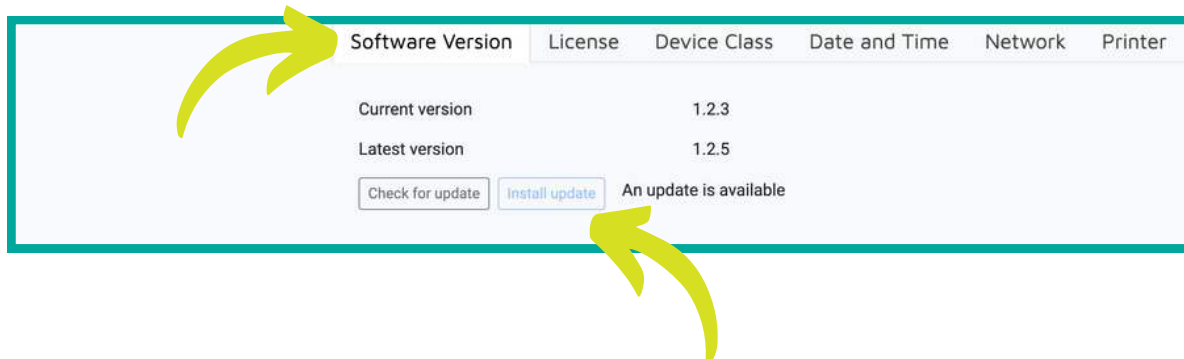


That's it! You're all set up and ready to go.
Next up: How to process a Mac in 3 easy steps!


Processing a Mac in 3 Easy Steps


IMPORTANT: Follow these steps BEFORE connecting the MacBook to be erased

- 1.
- Navigate to the Tasks page on the Device Link station
 - Click [Start a new Mac...](#)
 - This starts a new session that isn't terminated until Fail or Pass are pressed


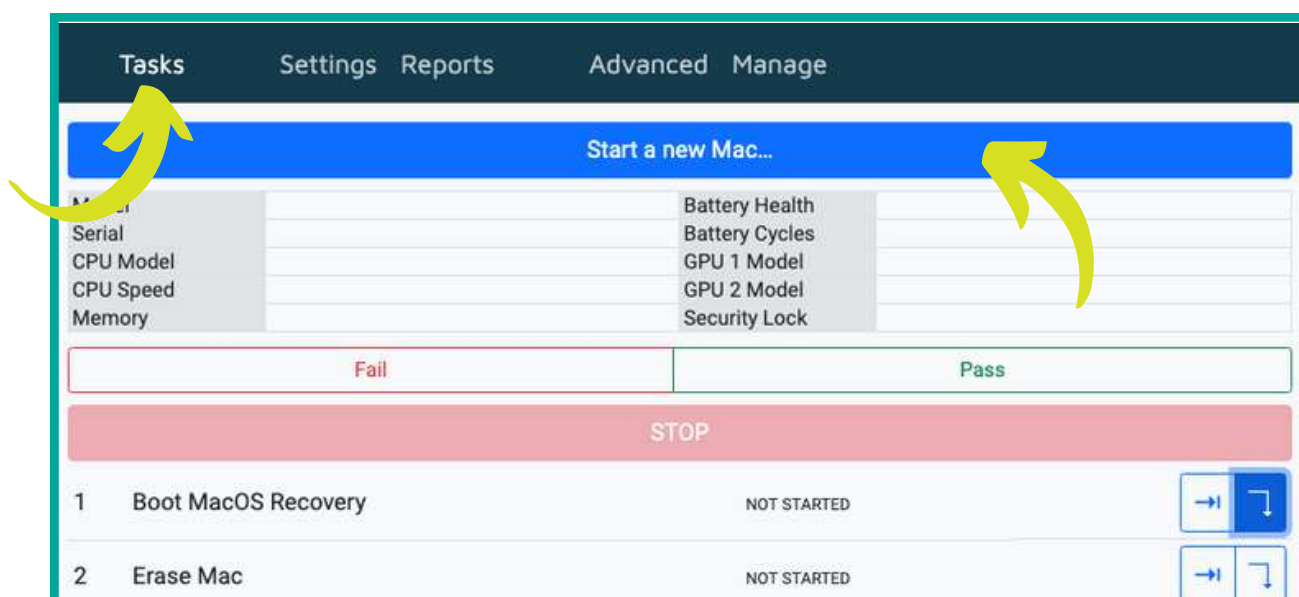


Time to connect the MacBook for erasure


2. • Connect the appropriate cables to the target MacBook and make sure it is **powered off**
- On the Tasks page, click the  on row 1

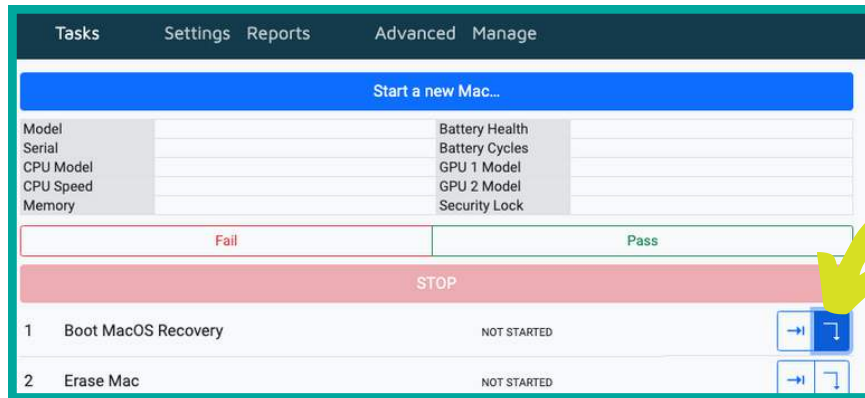

- If you see a **yellow** alert pop-up, Device Link needs an operator to do something
- A **red** alert pop-up indicates an error or warning
- Device Link will display a message in each instance to tell you what the issue is

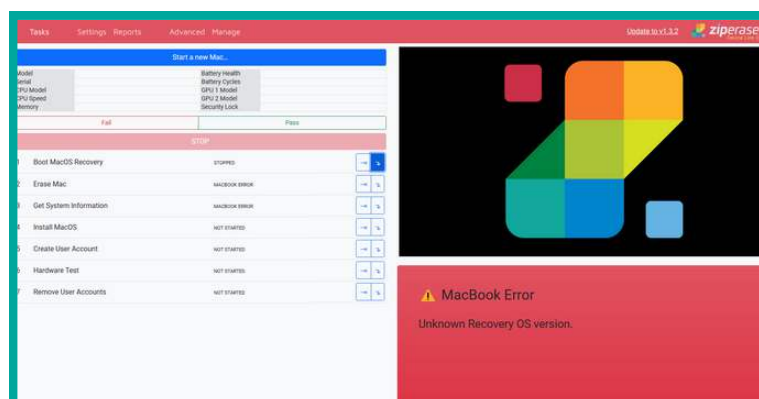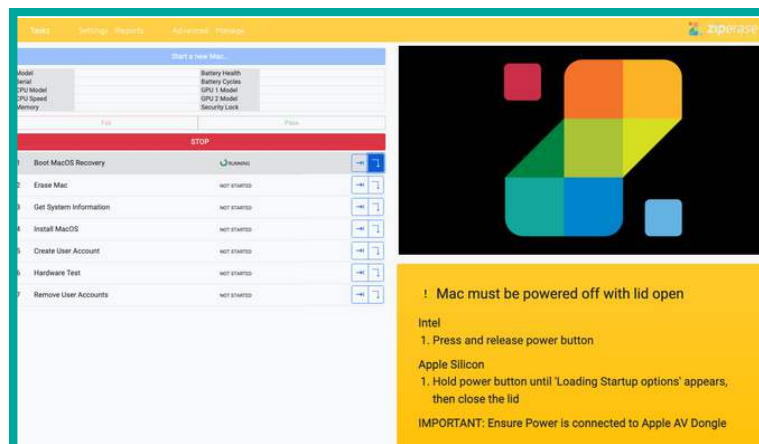

4. • Once all the task have been completed, click **Pass** or **Fail** to complete the session

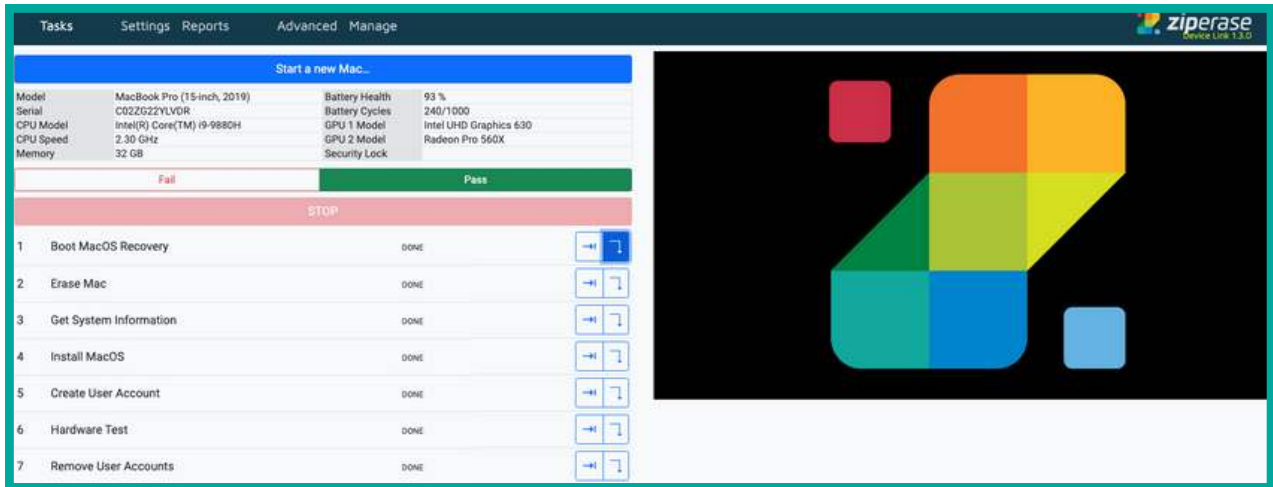

- The Mac can be removed from the Device Link Station, and the next session started

For more detailed instructions and to learn about configurations and options available, go to the Device Link User Guide in the Ziperase [Customer Portal](#) under the downloads tab:

